

# FIXED DOCK SEAL WITH HEAD PAD OR HEAD CURTAIN



## PROVIDES SEAL BETWEEN THE INTERIOR AND EXTERIOR OF THE OPENING

This seal helps keep out weather and saves on heating/cooling costs. The trailer compresses the foam top pad and side columns of this seal.

### High Quality Construction

- The fabric is double stitched with high strength polyester thread that has been UV treated for long term durability.
- The columns and top pad have premium grade foam with full compression and recovery properties in temperatures as low as -40°F.
- Vent openings drain moisture and promote air circulation for compression in the vertical columns and top pad.

### Fabric Advantages

- Available in multiple weights including a premium 40 oz fabric that has 6 times more abrasion resistance.
- All fabrics are treated with UV protection to help prevent fading.


### Additional Trailer Impact and Abrasion Protection

- Optional column wear pleats provide additional tearing and abrasion protection.
- Heavy duty 66 oz wear pleats on the top and bottom corners also available.

### Optional 4 Sided Weather Protection

- At docks where there is no leveler, a bottom seal pad can provide a seal on all four sides of the opening along way the side columns and top pad.

### 1-Year Limited Warranty

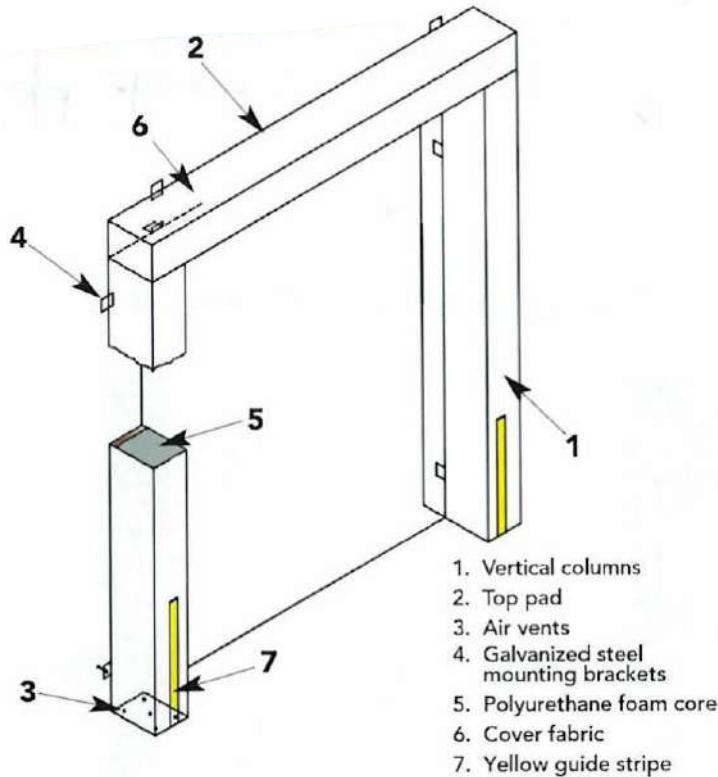

BACK COLUMN WIDTH	FRONT COLUMN WIDTH
10"	10"
12"	12"
8"	11"
8"	15"
12"	15"
12"	18"
12"	23"

<b>DIMENSIONS</b>	<b>STANDARD</b>	<b>OPTIONAL</b>
Column Height 8'	✓	
Column Height 7'6" to 9'		✓
Top Pad 12" High	✓	
Taller Top Pad 15" or 18"		✓
Top Pad Width 6'4" to 11"		✓
<b>CURTAIN</b>		
Velcro Hold Curtain Fabric or PVC (Drop: 12"/18"/24")		✓
<b>PROJECTION</b>		
Projection 10	✓	
Other Projection 8"-20"		✓
Projection Box 4/6/8/10/12		✓
Taper Projection 8°-20° top or bottom		✓
<b>FABRIC WEIGHT &amp; COLOR</b>		
22 oz (Black, Blue, Gray, Green, Brown)	✓	
40 oz Regular (Black, Blue, Gray, Green, Red, Brown)		✓
40 oz Premium (Black)		✓
<b>DOUBLE LAYER FABRIC</b>		
* Double layer of fabric on impact area of columns		✓
<b>FRAME</b>		
Treated Lumber	✓	
<b>DRAFT CONTROL</b>		
Two bottom draft flaps	✓	
<b>BOTTOM SEAL PAD</b>		
4' or 8' Long		✓
<b>GUIDE STRIPES</b>		
24 High	✓	
Full Height		✓
<b>MOUNTING</b>		
Galvanized Mounting Hardware	✓	
<b>SCUFF GUARDS</b>		
Scuff Guards (40 oz Premium, Black)		✓
48" tall additional layer of fabric inside columns		✓
<b>SECURITY SEAL</b>		
4 or 8' High		✓
<b>WEAR PLEATS</b>		
Wear Pleats 4/8/16" Exposure (same weight/color available as above) 22oz	✓	
Wear Pleats 4/8/16" Exposure (same weight/color available as above) 40oz		✓
Heavy Duty 66 oz Top and Bottom Corner Pleats, 4" exposure (Black, Blue, Orange)		✓



# IDEAL SEAL MANUFACTURING

**802. E. Owassa Road Pharr, Texas 78577**

