

FIXED DOCK SEAL - ISM 420



SHELTER WITH ADJUSTABLE CURTAIN: VERSATILE BUILDING PROTECTION FOR EFFICIENT CLIMATE CONTROL

This shelter has flexible vertical panels and a curtain to serve a wide variety of trailers with different widths and heights, while still providing weather protection to save on heating/cooling costs. It provides full width and height access to the back of the trailer.

Construction Advantages


The side and top panels are covered with Transparent fiber glass for light exposure in the Dock area and trimmed with aluminum angle for a clean, durable finish. Both upper corners of the shelter have overlapping wear pleats for added protection from trailer impacts and tearing. The top panel is peaked to drain water.

- A foam bead is sewn into the leading edge of the vertical front panels and top panel.
- Vertical panels are double layered fabric at the leading edge of the impact area.
- The fabric is double stitched with high strength polyester thread that has been UV treated for improved durability.
- Fiberglass stays are encased in multi-layer pockets and provide the vertical panels with strength (Top stays are "Z" style to keep the curtain straight).

Fabric Advantages

- Made of fire resistant fabric and available in multiple weights including a premium 40 oz fabric that has six times more abrasion resistance than standard fabric.
- For the most punishing applications, optional premium plus fabric is recommended. It is similar to the belts used on heavy duty, Industrial conveyors. It provides elevated resistance to UV fire, abrasion, tearing, hot, stains, salt, and oil.
- All fabrics are treated with UV protection to help reduce fading.

1-Year Limited Warranty

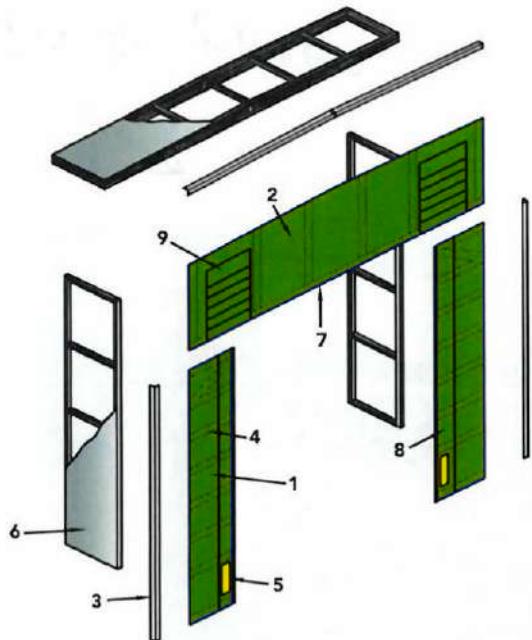

- 1. Vertical panels
- 2. Top panel
- 3. Angle trim
- 4. Fiberglass stays
- 5. Yellow guide stripe
- 6. Painted galvanized steel cladding
- 7. Foam bead
- 8. Double layer of fabric on impact area
- 9. Protective wear pleats

DIMENSIONS

11'6" Wide, 11' High, 21" Vertical Panel Inward Projection

Add Width (12' 8" Max.)

Add Height (12' 6" Max.)

Vertical Panel Inward Projection (18"-35")

CURTAIN

36" Curtain Drop

Add Curtain Drop 1 Increments (60" Max.)

FABRIC WEIGHT & COLOR

22 oz (Black, Blue, Gray, Green, Brown)

40 oz Regular (Black, Blue, Gray, Green, Red, Brown)

40 oz Premium (Black)

DRAFT CONTROL

2 Draft Pads (Same fabric weight/color available as above)

BUMPERS (PROTECTIVE STEEL GUARDS)

2 Steel Bumpers (Hardware not included)

GUIDE STRIPES

14 High

Full Height

MOUNTING

Galvanized Mounting Hardware and Stabilizing Bracket

VERTICAL PANELS

Vertical panels with fiberglass stays

	STANDARD	OPTIONAL
11'6" Wide, 11' High, 21" Vertical Panel Inward Projection	✓	
Add Width (12' 8" Max.)		✓
Add Height (12' 6" Max.)		✓
Vertical Panel Inward Projection (18"-35")		✓
CURTAIN		
36" Curtain Drop	✓	
Add Curtain Drop 1 Increments (60" Max.)		✓
FABRIC WEIGHT & COLOR		
22 oz (Black, Blue, Gray, Green, Brown)	✓	
40 oz Regular (Black, Blue, Gray, Green, Red, Brown)		✓
40 oz Premium (Black)		✓
DRAFT CONTROL		
2 Draft Pads (Same fabric weight/color available as above)		✓
BUMPERS (PROTECTIVE STEEL GUARDS)		
2 Steel Bumpers (Hardware not included)		✓
GUIDE STRIPES		
14 High	✓	
Full Height		✓
MOUNTING		
Galvanized Mounting Hardware and Stabilizing Bracket	✓	
VERTICAL PANELS		
Vertical panels with fiberglass stays	✓	

TREATED LUMBER FRAME

ISM 420-24: 24" Projection

ISM 420-36: 36" Projection

ISM 420-48: 48" Projection